
Technical data sheet





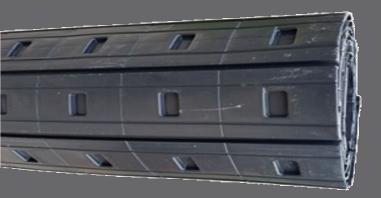

root guiding barrier

RootGuideRoll Type L Root guiding barrier

Application : top end equal to ground level.

Root guiding on roll offers fewer escape routes for roots as compared to short panels, and is easy and fast to install. RootGuideRoll is therefor ideal for long lengths parallel to an edging.

Standard available for various installation depths:: (Other heights available on request)

30 cmRootGuideRoll 030L45 cmRootGuideRoll 045L60 cmRootGuideRoll 060L75 cmRootGuideRoll 075L90 cmRootGuideRoll 090L105 cmRootGuideRoll 105L120 cmRootGuideRoll 120L

: recy polymer
: black
: 30 m per roll
: 2 kg/m2
: 100 years

* Bottom of the barrier to at least 10 cm below the zone of protection e.g. road foundation/obstacle/utilities etc

Manufacturing in ISO-certified company. An ISO 9001 certificate shows that your organisation is customer-focused and committed to delivering consistent quality products.



HTW Treerootsystems BV Vonderweg 1 | 7468DCV | Enter | The Netherlands +31 (0) 85 04 94 646 | <u>www.Treerootsystems.nl</u>

Root guiding ribs

Function; guide roots deeper into the ground to ensure tree stability and protect other underground infrastructure.

- Vertical over the entire height
- Continuous from top to bottom
- At least 1 cm high
- Perpendicular to the wall
- Rib spacing 15 cm apart

Anti-lift ground lock tabs

Function; preventing panel being pushed up.

- Horizontally oriented
- Perpendicular to the wall
- Surface area per anchor >4 cm2
- Minimum 40 anchors per m2 barrier

Barrier thickness

Function ; preventing root penetration.

Thickness 2mm

RootGuideRoll is also available in 1mm thicknesses: RootGuideRol type S, similar functionality with less material.

